RoHS COMPLIANT

Характеристики

- Тип кабеля: Cat. 6A UTP
- Частота: 500 Mhz
- Тип коннектора: RJ45
- Схема разводки: T568B
- Температура эксплуатации: -20 0C ~ +50 0C

Проводник

- Тип проводника: медный многожильный, 28 AWG
- Изоляция: HDPE
- Диаметр: 0,61 ± 0,2 мм

Коннектор

- Тип: RJ45 (8P8C)
- Материал: PC
- Материал контактов: медный сплав, покрытие золотом 50U”

Параметры кабеля

- Броня: оплетка из нержавеющей проволоки
- Внешняя оболочка: полиэтилен
- Внутренняя оболочка: ПВХ
- Диаметр кабеля: 6,4 ± 0,2 мм

Электрические параметры

- Сопротивление проводника: 24,2Ω/100м
- Смещение задержки: 45нс/100м
- Задержка распространения: 545 нс/100м
- Fluke test DSX 8000 Channel: PASS

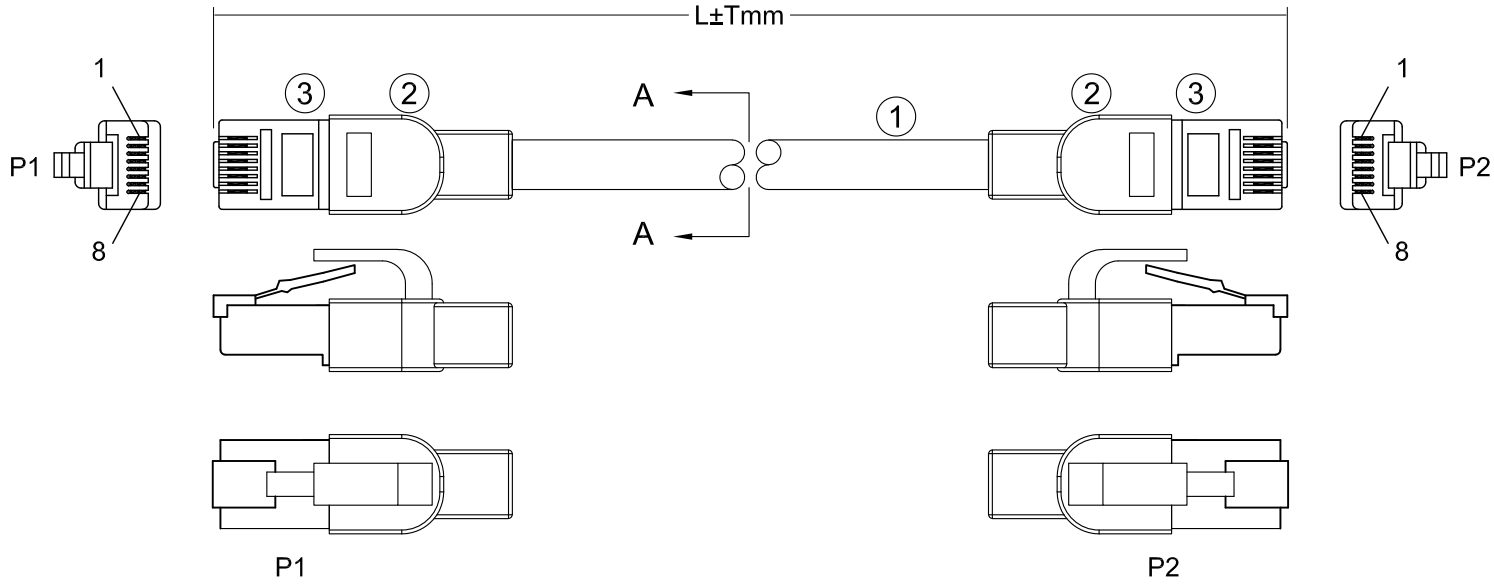

SEC:A-A

P1	P2	T568B
1	1	WHITE/ORANGE
2	2	ORANGE
3	3	WHITE/GREEN
4	4	BLUE
5	5	WHITE/BLUE
6	6	GREEN
7	7	WHITE/BROWN
8	8	BROWN

NO.	SPECIFICATION	Q'TY
3	RJ45 PLUG: 8P8C 50U" GOLD PLATED TWO-PIECE PLUG.	
2	MOLDED: PVC MOLDED BOOT.	
1	CABLE: CAT6A UTP 4P/28AWG(BC) OD=Ø6.4±0.2MM PVC JACKET+SUS204 JACKET+PE JACKET.	

BOM LIST

ITEM NO:	Inner Armored Cat.6A U/UTP Patch Cable	DRAWER DATE	LY 20191030
TITLE		CHECKED DATE	MTC 20191030
CUSTOMER		APPROVED DATE	
MATERIAL	SCALE		
REV.	UNIT	MM	
DRAWING NO:	6AU0K640712B 137---91030164		
ACAD FILE	E:\		

Cabeus